





#### UTILITY IS OUR NAME. VERSATILITY IS OUR GAME.

Versatility is the name of the game when you're looking for a utility tractor. The Farmall U series works harder on all kinds of operations—from livestock and commercial hay productions to diversified farms—and in all kinds of weather, thanks to a comfortable cab. Premium loaders and dozens of loader attachments, as well as a high-visibility roof panel, really keep things moving. For more about loaders, see page 8.



#### TOOLS FOR EVERY JOB.

Need more than just a loader? A variety of attachments, an option for a bigger hydraulic pump and up to 98 PTO HP means you can pull, push, blow, bale, rake, cut, lift, grade—and just about anything else you can think of—with confidence.





# SPEND A MORE COMFORTABLE DAY IN OUR DELUXE CAB.

Case IH asks operators like you to provide feedback on all our cabs so we can continuously improve the comfort and ergonomics. Our customers tell us that the new Farmall U cab delivers like no cab ever before. More hours with less fatigue means there's more of you left at the end of a hard day.

The Farmall U comes with a generous list of standard equipment and features, including\*:

- A High-visibility roof panel (not shown)
- **B** FOPS protective structure in roof panel (not shown)
- C New HVAC system with dashboard vents
- D Instrument cluster that pivots with the steering wheel
- E Shuttle lever located under the steering wheel
- F Ergonomic joystick
- G Larger overall internal space, new interiors and ergonomic control positions

- H Best-in-class accessibility to the driver's seat
- I Standard factory radio with MP3 player connection (not shown)
- J Air filter and fuse box accessible on fender (not shown)
- K Flat-deck floor
- L Instructional seat
- M Optional heated air suspension seat with 15 degree swivel (not shown)






### MAKE SHORT WORK OF EVER-CHANGING CHORES.

A front-end loader turns a tractor into a versatile, powerful workhorse. For general purpose, heavy duty or high volume tasks, there are a number of attachment choices, including buckets, forks, grapples, bale spikes, grips, and more. The Quick-Latch system allows you to install and remove the loader in minutes, and the Quick-Attach faceplate lets you easily switch between attachments. But that's not all. You can equip your Farmall U tractor with a Case IH mower, mower-conditioner, baler, tiller or cutter to accomplish even more. No matter what's on your "to do" list, there's an attachment for that.



| MODEL        | РТО НР |  |
|--------------|--------|--|
| Farmall 105U | 91     |  |
| Farmall 115U | 98     |  |

| LOADER MODEL                                       | L735 NON SELF-LEVELING | L735 SELF-LEVELING  | L745 NON SELF-LEVELING | L745 SELF-LEVELING     |
|--|------------------------|---------------------|------------------------|------------------------|
| Lift Capacity Maximum<br>Height @ 31.5 in (800 mm) | 2,844 lb (1 290 kg)    | 2,954 lb (1 340 kg) | 3,616 lb (1 640 kg)    | 3,814 lb (1 730 kg)    |
| Boom Breakout force<br>@ 31.5 in (800 mm)          | 2,976 lb (1 350 kg)    | 3,285 lb (1 490 kg) | 3,858 lb (1 750 kg)    | 4,254 lb (1 930 kg)    |
| Maximum Lift Height<br>@ Pivot Pins                | 11 ft 3 in (3.43 m)    | 11 ft 3 in (3.43 m) | 12 ft 2.75 in (3.73 m) | 12 ft 2.75 in (3.73 m) |
| Reach @ Maximum Lift                               | 2.1 ft (.64 m)         | 2.1 ft (.64 m)      | 2.7 ft (.8 m)          | 2.7 ft (.8 m)          |

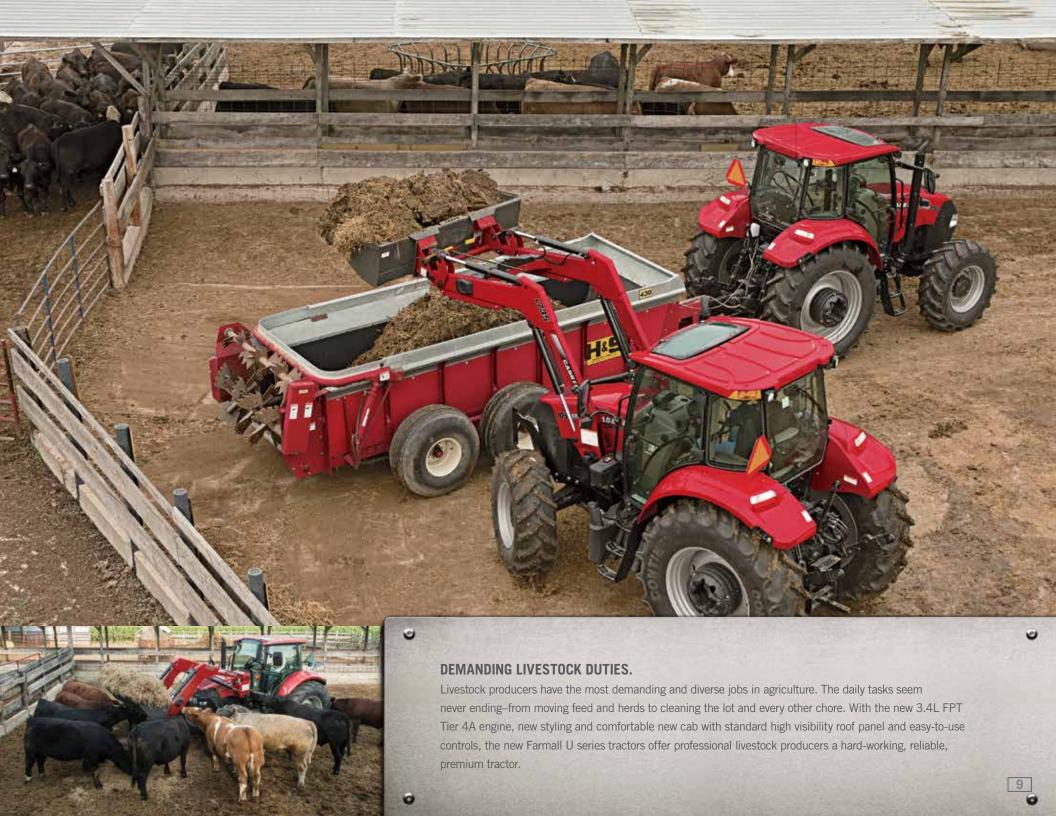

#### IT'S LIKE HAVING A PARTNER BESIDE YOU ALL SEASON.

Case IH has professionals in the field to support your operation: two out of three Case IH employees work right out where you do. Our dealers have the know-how to help you manage your equipment investment to get the most out of every dollar. Our parts and service technicians have the skills and expertise it takes to maintain your equipment and keep it operating at peak performance. And CNH Capital can work with you to customize financing solutions that fit your unique needs. It's an entire system with only one goal in mind – to keep you up and running, working the way you want.







Your Case IH dealer understands you need an optimum return on your investment. That means fitting the right machine to the specific demands of the work you do. Your dealer can assist you in selecting the Case IH tractor and attachments that fit for your operation's needs and use pattern. And they'll be there for years to come, backing up your purchase with support and service.

## MAX SERVICE: MAXIMUM UPTIME, SEASON AFTER SEASON.

In agriculture you can always expect the unexpected. Case IH was the first to offer manufacturer-direct aftersales support—Case IH Max Service. Our dealers provide OEM parts, components, full-service maintenance programs and outstanding warranties—at no additional cost—to keep you up and running, and completely satisfied.

Need a part? Call 1-877-4CASEIH and it is on its way. And, we offer OEM remanufactured parts for the most critical components on most popular Case IH machinery. Many reman parts come as drop-in assemblies, getting you back to work quickly—at a fraction of the cost.



## FOR MORE THAN 50 YEARS.

CNH Capital's extensive experience in the equipment industry creates a deep understanding of your unique needs. Competitive financing with flexible payments can be timed to your cash flow. Or conserve capital and reduce upfront payments with operating lease options. Or choose from commercial revolving accounts to meet your immediate needs. We can even help protect your investment with a variety of insurance and equipment protection products. There's a financing option that's perfect for the way you operate. CNH Capital can help you find it.

| FARMALL U SPECIFICATIONS                     | Farmall 105U                            | Farmall 115U |  |
|--|---|--------------|--|
| ENGINE                                       |   |              |  |
| Туре   | 4-cylinder                              |              |  |
| Displacement cu. in. (L)                     | 207 (3.4)                               |              |  |
| Gross Engine HP                              | 105                                     | 115          |  |
| PTO HP                                       | 91                                      | 98           |  |
| Emissions                                    | Tier 4A                                 |              |  |
| Emissions System                             | Cooled Exhaust Gas Recirculation (CEGR) |              |  |
| TRANSMISSIONS                                |   |              |  |
| Standard                                     | 12 × 12 Power Shuttle                   |              |  |
| Option 1                                     | 20 × 20 Power Shuttle with Creeper      |              |  |
| Option 2                                     | 24 × 24 Hi-Lo                           |              |  |
| 3-POINT HITCH                                |   |              |  |
| Lift Capacity @ 24" lbs. (kg)                | 6,393 (2 900)                           |              |  |
| Front Hitch Lift Capacity @ 24" lbs. (kg)    | 3,968 (1 800)                           |              |  |
| PTO  |   |              |  |
| Base PTO Speeds rpm                          | 540/1,000                               |              |  |
| Optional PTO Speeds rpm                      | 540/540E/1,000                          |              |  |
| Optional Front PTO rpm                       | 1,000                                   |              |  |
| HYDRAULICS                                   |   |              |  |
| Base Rear Remotes                            | 2 Remotes                               |              |  |
| Optional Rear Remotes                        | Up to 3 Remotes                         |              |  |
| Main Pump Flow gpm (I/min)                   | 17.2 (65)                               |              |  |
| Optional Main Pump Flow gpm (I/min)          | 22.2 (84)                               |              |  |
| Steering and Services Pump gpm (I/min)       | 10 (38)                                 |              |  |
| Optional Steering and Serv. Pump gpm (I/min) | 11.4 (43)                               |              |  |
| DIMENSIONS*                                  |   |              |  |
| Overall Length in. (mm)                      | 164 (4 161)                             |              |  |
| Minimum Width in. (mm)                       | 75 (1 913)                              |              |  |
| Minimum Height in. (mm)                      | 103 (2 612)                             |              |  |
| Minimum Weight lbs. (kg)                     | 9,370 (4 250)                           |              |  |

<sup>\*</sup>With 16.9R-34 rear tires



SAFETY NEVER HURTS!\*\* Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs, and use any safety features provided. CNH America LLC reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions and illustrative material herein are as accurate as known at time of publication, but are subject to change without notice. Availability of some models and equipment builds varies according to the country in which the equipment is used.

©2013 CNH America LLC. All rights reserved. Case IH is a registered trademark of CNH America LLC, are the property of those respective companies.

Printed in U.S.A. www.caseih.com